

evoluzione cyclesports

installation instructions

license plate relocater for ducati 749/999

part number 90025

©2006, 2004, 2003 by evoluzione.net, inc.

this **evoluzione cyclesports license plate relocater** is designed to be a lightweight, simple addition to help clean up the tail end look on the ducati 749/999 superbikes. the relocater bracket is made from 5052-h32 aluminium and is anodized for long life. also included is an illumination light for the license plate.

introduction

the **evoluzione cyclesports license plate relocater** is easy to install by carefully following the instructions. [read all instructions first to familiarize yourself with the parts and procedures.](#)

installation

caution: It is suggested that the bike be allowed to cool off for a few hours to avoid burns from hot exhaust and parts.

step 1. remove the license plate from the bracket.

step 2. use a philips screwdriver to remove the two screws from the

black plastic housing under the tail light. remove the plastic cover and disconnect the two wires leading to the license plate illumination light (please see photo one).

step 3. using a 10mm socket, remove the four nuts holding the stock license plate bracket to the lower part of the exhaust. remove the bracket from the bike. install the four supplied acorn nuts back onto the mounting studs.

step 4. using a 4mm allen wrench, remove the two lower bolts that mount the tail light assembly to the exhaust. using a 3mm allen wrench, remove the upper mounting bolt. pull the assembly back slightly and unplug the factory wire harness.

step 5. place the tail light assembly upside down on a work bench. carefully slide the red lens and reflector assembly out of the housing (please see photo one).

step 6. using a 13/32" drill bit, drill a hole in the tail light assembly as shown in photo one. install the metal collar from the outside and secure with the lock washer and

nut on the backside. install the bulb into the bulb holder and thread the assembly into the collar (from the backside). thread the clear lens into the collar from the outside.

step 7. slip one of the supplied pieces of shrink wrap over each of the license plate light wires. connect these wires to the factory license plate light harness (note: the wires can be hooked up either way). slide the shrink wrap over the wire connects. using a heat gun or blow dryer, carefully shrink the wrap over the connections, making sure the terminals are not exposed (please see photo two).

step 8. reinstall the reflector & lens back into the housing. slide the black plastic cover over the license plate light assembly and resecure with the two philips screws.

step 9. plug the factory wire harness into the tail light assembly. remount the tail light assembly to the exhaust with the small center bolt using a 3mm allen wrench. place the supplied license plate bracket under the tail light assem-

bly and install the two factory bolts (please see photo three), using a 4mm allen wrench. attach the license plate to the bracket.

step 10. turn the key to "on" and check that the license plate light functions correctly.

parts list

- relocator bracket assembly
- collar with nut/washer
- bulb holder w/ harness
- bulb
- clear lens
- ø3/8" shrink wrap (2)
- acorn nuts (4)

tools required

- 10mm socket
- 3mm & 4mm allen wrench
- drill and 13/32" drill bit
- philips screwdriver
- heat gun (or blow dryer)

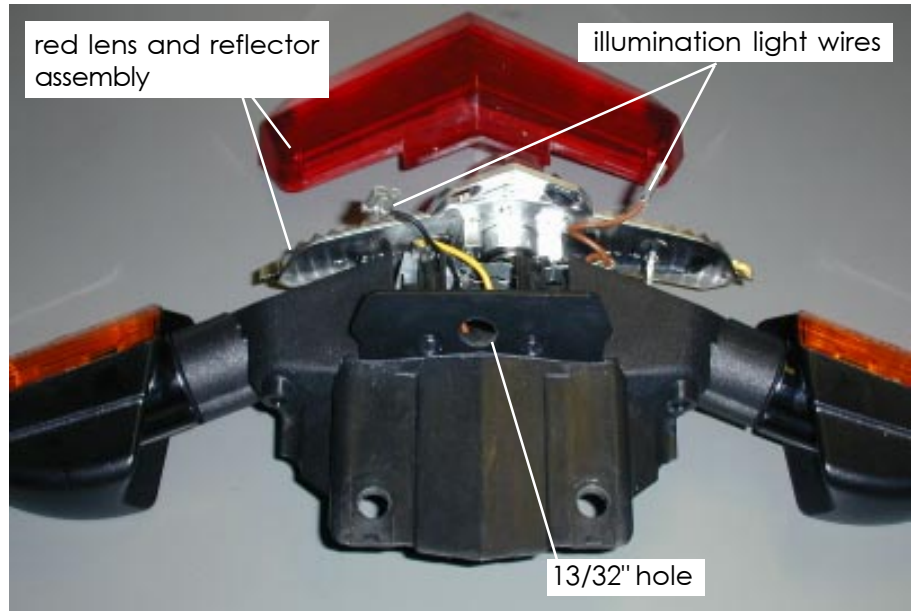


photo one



photo two

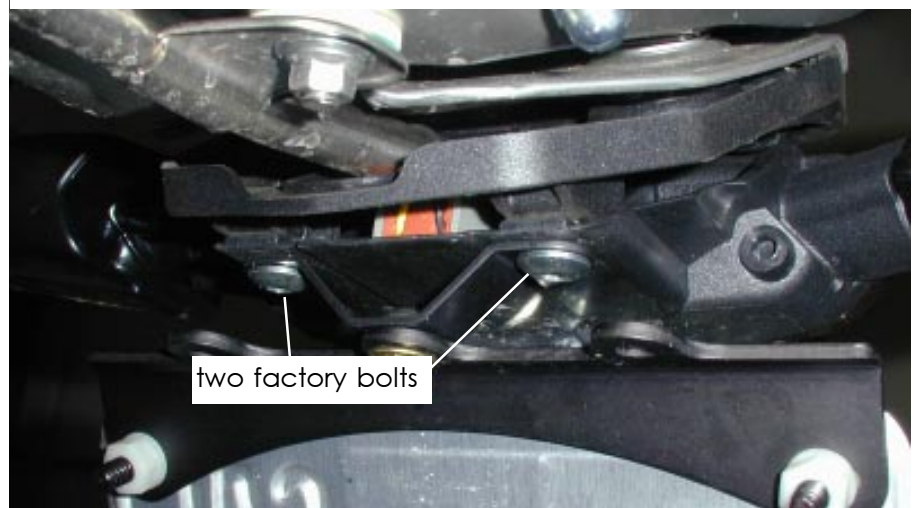


photo three