

# evoluzione cyclesports

installation instructions

## performance throttle controller for ducati 749/999

part number 90080

©2006, 2005 by evoluzione.net, inc.

this **evoluzione cyclesports performance throttle controller** allows the rider to better control the quick revving nature of the ducati 749/999 superbikes. the basis of this design is to slow down the rate of throttle opening in the first half of your hand movement. this gives more precise control during transitions such as rolling on the gas coming out of corners. we then speed up the second half of the movement to create a slightly shorter total rotation (allowing you to reach full throttle quicker).

### introduction

the **evoluzione cyclesports performance throttle controller** is easy to install by carefully following the instructions. read all instructions first to familiarize yourself with the parts and procedures.

### removal

**step 1.** remove the bar end on the handlebar.

**step 2.** slip the rubber cover of the

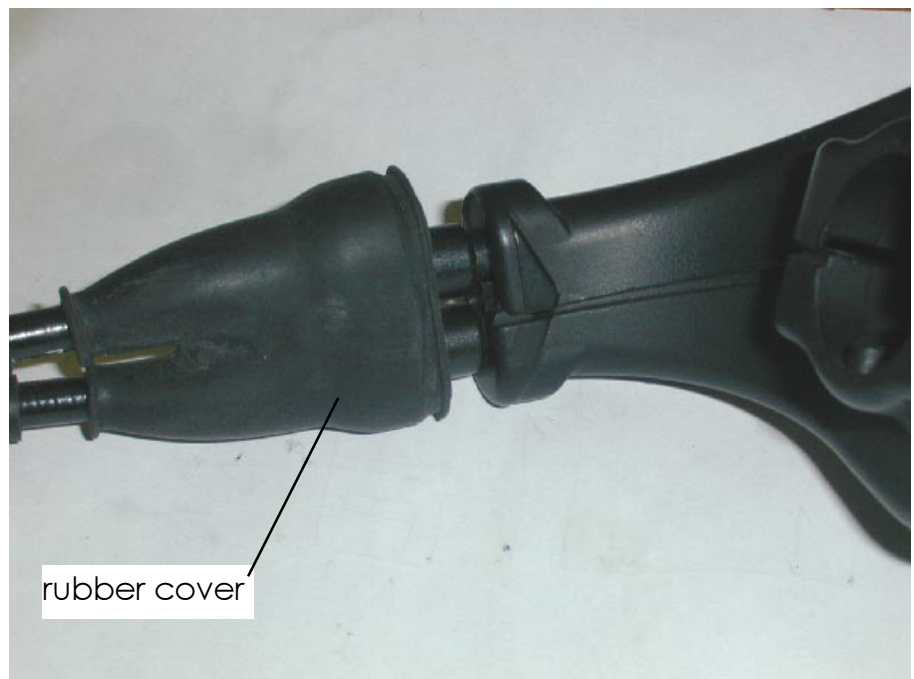


photo one

throttle control cables (see photo one).

**step 3.** unscrew the two screws of the throttle control housing and open the control housing.

**step 4.** remove the cable ends from

their seats and take the opening and closing cables off the pulley (see photo two).

**step 5.** slide the stock throttle control off the handlebar and remove the grip from the throttle tube.

38580 celine cove, suite "b"  
murrieta, california 92562

phone: 951.639.0951  
fax: 951.639.3022

october 2006, revision 01

## installation

**step 6.** slide the grip onto the **evoluzione cyclesports performance throttle controller**.

**step 7.** slide the **evoluzione cyclesports performance throttle controller** onto the handlebar

**step 8.** install the cable ends into their seats on the pulley.

**step 9.** install the throttle control housing and tighten the two screws.

**step 10.** slip the rubber cover back on the throttle control cables and reinstall the bar end.

### parts list

performance throttle control

### tools required

metric socket and drive set  
shop rags

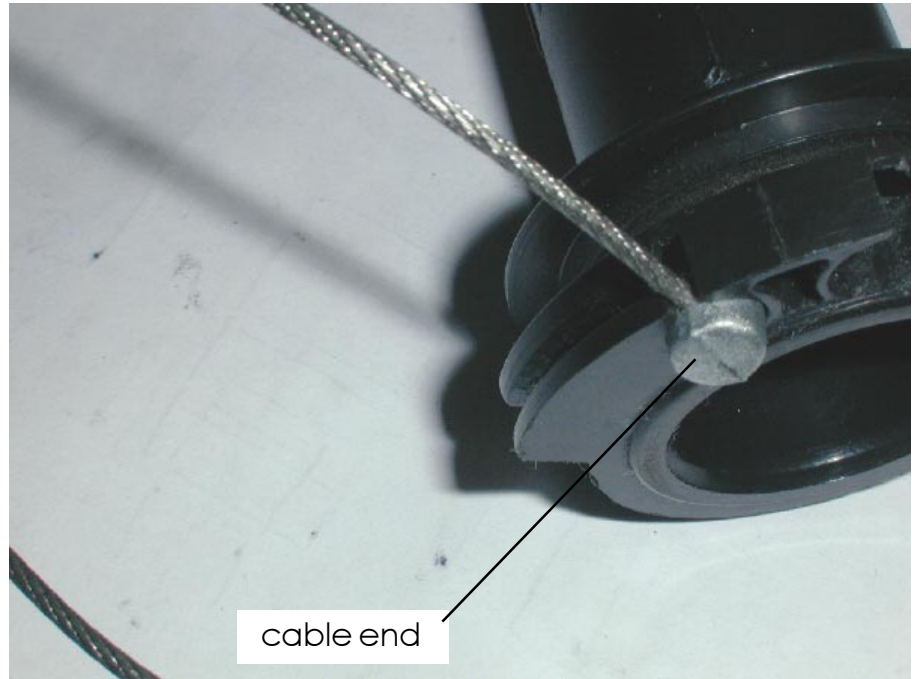


photo two