

evoluzione cyclesports

installation instructions

license plate relocater for mv agusta brutale

part number 92022

© 2006 by evoluzione.net, inc.

this **evoluzione cyclesports license plate relocater** is designed to be a lightweight, simple addition to help clean up the tail end look on the mv agusta brutale. the relocater bracket is made from 5052-h32 aluminium for long life and light weight.

introduction

the **evoluzione cyclesports license plate relocater** is easy to install by carefully following the instructions. read all instructions first to familiarize yourself with the parts and procedures.

installation

caution: It is suggested that the bike be allowed to cool off for a few hours to avoid burns from hot exhaust and parts.

step 1. remove the rear seat.

step 2. unplug the two turn signal wires and license plate light wire located underneath the seat frame (please see photo one).

step 3. using an 8mm socket and

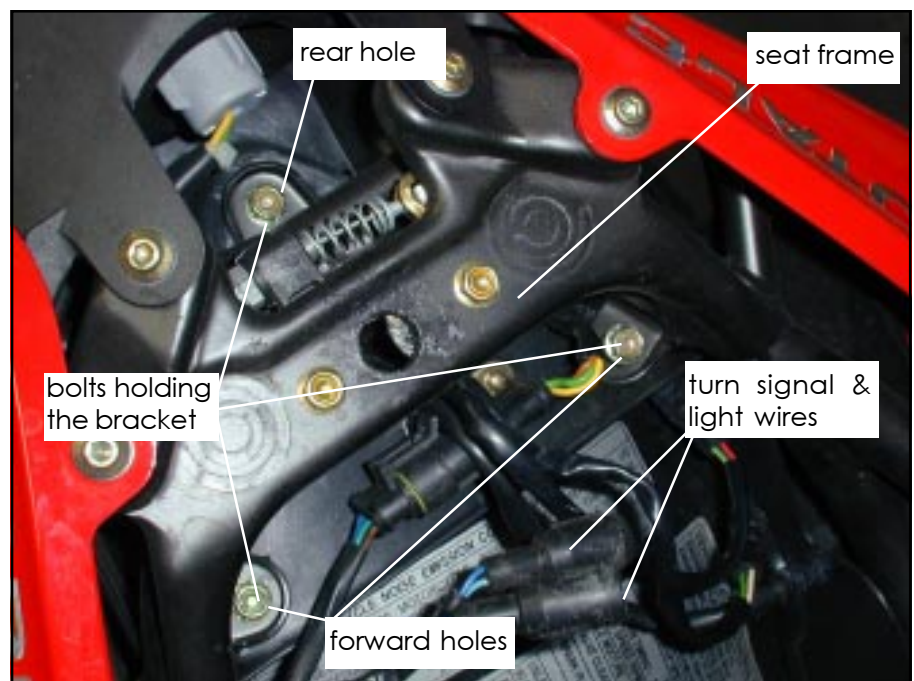


photo one

a ratchet, remove the three bolts holding the stock license plate bracket. remove the bracket. re-install the two forward bolts and secure with the supplied washers and locknuts (please see photo

one).

step 4. using a 2.5mm allen, remove the two screws holding the turn signal and light wires cover (please see photo two).

step 5. remove the license plate

38580 celine cove, suite "b"
murrieta, california 92562

phone: 951.639.0951
fax: 951.639.3022

october 2006, revision 01

from the stock license plate bracket.
step 6. using an 8mm socket and ratchet, remove both turn signals from the stock bracket noting left and right.

step 7. feed the turnsignal wires through the larger of the two holes on the sides of the supplied relocater bracket and reattach the turnsignals using the lower slot holes.

note: make sure the drain holes at the lenses are pointing down.

step 8. remove the light from the back of the light housing. using an 8mm socket and ratchet, remove the light housing. install the light housing onto the supplied light bracket as shown in photo three. plug the light back into the light housing.

step 9. install one of the supplied 6m washers onto the supplied 6m x 70mm bolt. from the underside, slide the bolt through the center hole in the bracket and into the light assembly with the light pointing down on the license plate. slide the supplied aluminum tube on the bolt. secure the assembly to the rear hole shown in photo one with the other supplied 6mm washer and supplied locknut and tighten.

step 10. using the supplied tie wrap, neatly wrap the turn signal and light wires around the aluminum tube and feed the wires through to the seat store area.

step 11. connect the turn signal wires with the wire marked dx being right and sx being left. connect the license plate light wire.

step 12. install the license plate onto the new bracket.

step 13. reinstall the rear seat.

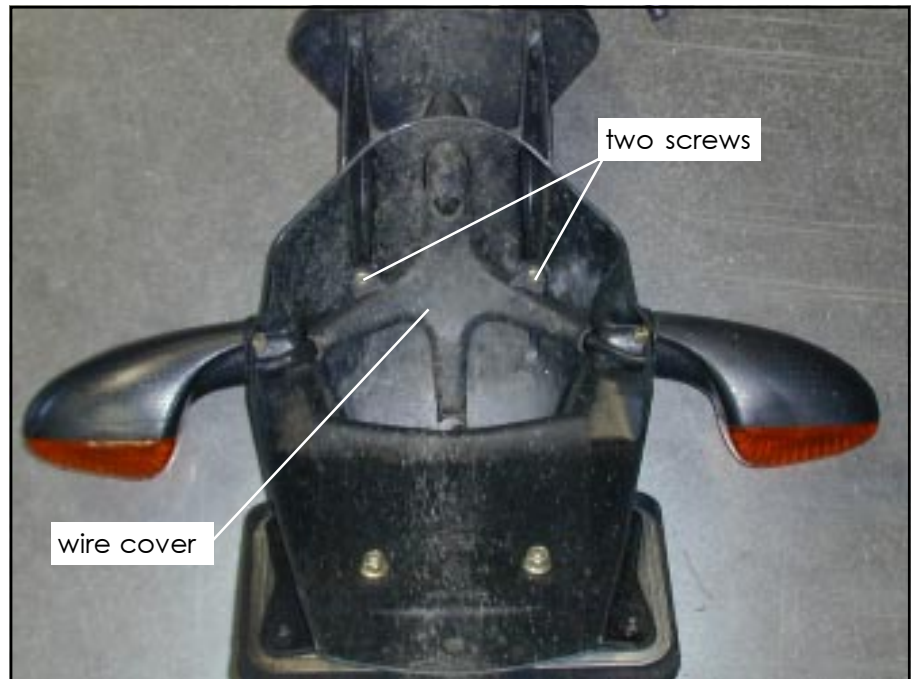


photo two

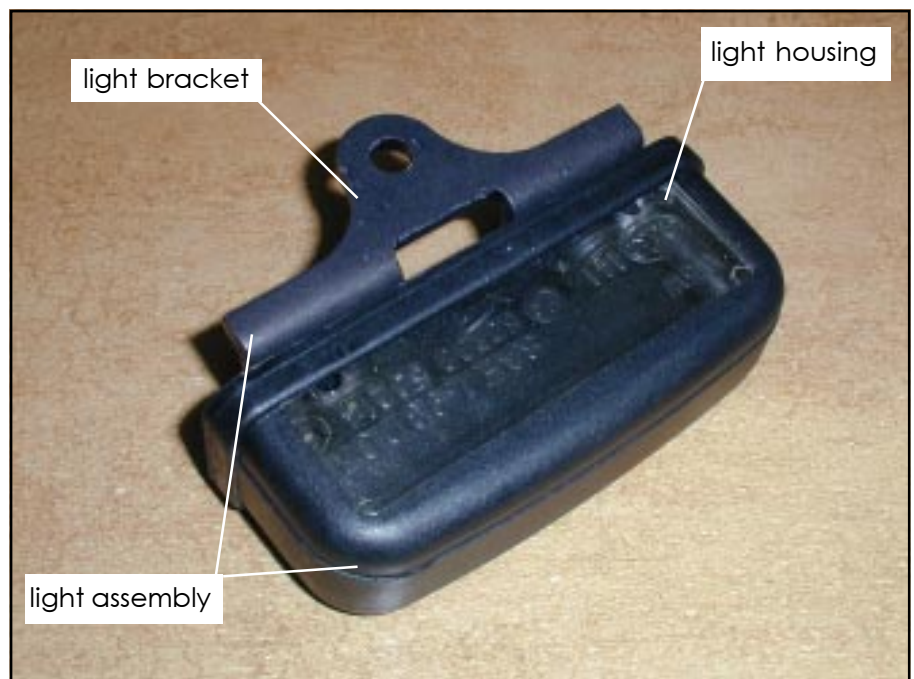


photo three

parts list

aluminum relocater bracket
aluminum tube
aluminum light bracket
bolt 6m x 70mm
washer 6m (4)
locknut 6m (3)
tie wrap

tools required

8 & 10mm sockets & driver
2.5 & 5mm allen wrenches