

evoluzione cyclesports

installation instructions

license plate relocater for 2005/2007 bmw k1200s/r

part number 96021

© 2006, 2005 by evoluzione.net, inc.

this **evoluzione cyclesports license plate relocater** is designed to be a lightweight, simple addition to help clean up the tail end look on the bmw k1200s/r. the relocater bracket is made from 5052-h32 aluminium and anodized for long life and light weight.

introduction

the **evoluzione cyclesports license plate relocater** is easy to install by carefully following the instructions. read all instructions first to familiarize yourself with the parts and procedures.

installation

step 1. using a t-25 torx, remove the four screws holding the license plate.

step 2. using a t-25 torx, remove the three screws holding the stock license plate bracket.

step 3. remove the license plate light from the light housing by pulling the rubber light holder out.

step 4. remove the light housing

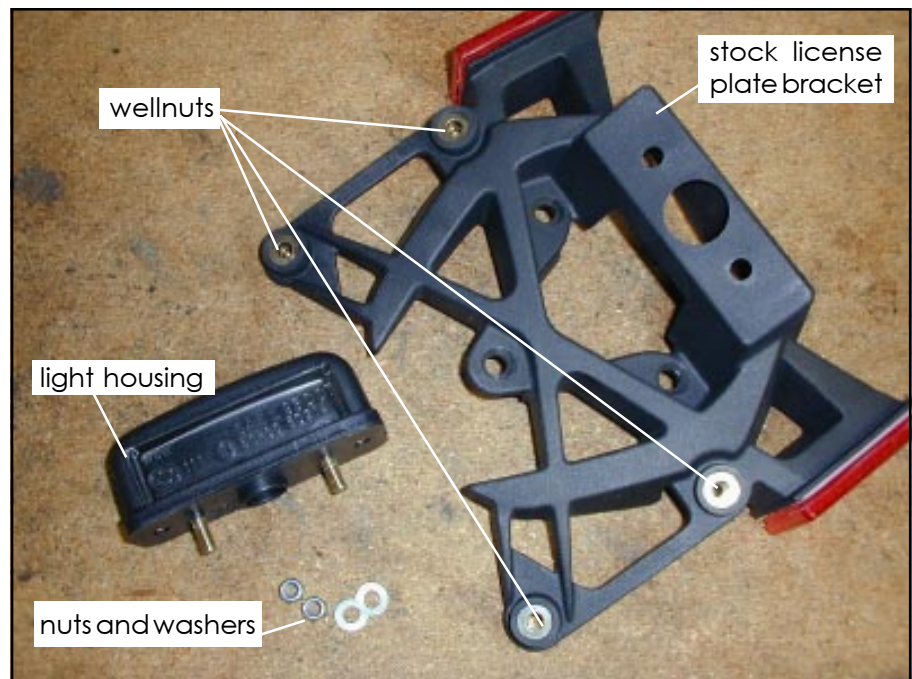


photo one

from the stock license plate bracket by removing the two nuts and washers with an 8mm socket and drive (please see photo one).

step 5. install the light housing on the evoluzione bracket with the

two nuts and washers removed earlier (please see photo two).

step 6. if applicable, remove two of the wellnuts from the stock license plate bracket by pushing them out (please see photo one).

38580 celine cove, suite "b"
murrieta, california 92562

phone: 951.639.0951
fax: 951.639.3022

october 2006, revision 02

step 7. install the two wellnuts into the evoluzione bracket by removing the washer and then by squeezing the head into the holes in the bracket. reinstall the washers into the wellnuts (please see photo two). if your stock bracket does not have the wellnuts, install the two supplied rubber grommets instead.

step 8. install the license plate light into the light housing by pushing the rubber light holder in.

step 9. using a 3mm allen, install the evoluzione bracket with the three supplied screws through the countersunk holes (please see photo two).

step 10. install the license plate onto the new bracket.

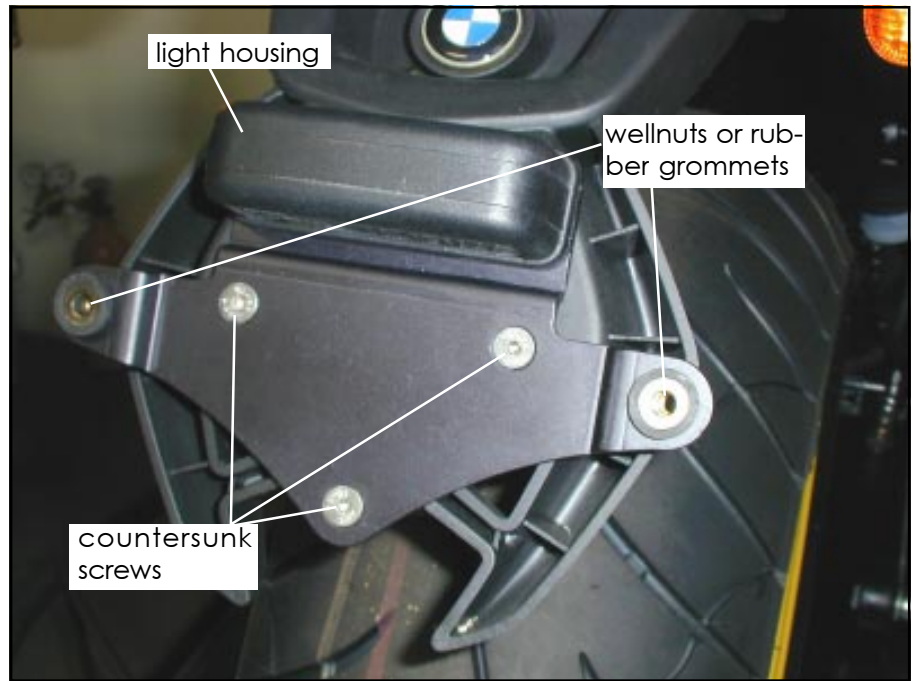


photo two

parts list

aluminum relocater bracket
m5x20mm screws (3)
rubber grommets (2)

tools required

8mm socket & driver
3mm allen wrench
t-25 torx